



Powered by the exclusive iQ Blower System™ with GPS Technology (see page 62) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; external blowers offered separately.

Mesh lined Hi-Flow™ baffle filters provide superior grease capture to ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.

Works with optional Universal Make-Up Air Dampers.

Model Numbers:

PK2230

PK2239

PK2245

PKEX2239

PKEX2245




Integrated electronic controls include delay-off to continue ventilation after cooking and filter clean reminder to keep the kitchen smelling fresh.



Halogen lights provide brilliant 3-level cooktop lighting.



Use the calibration button to activate GPS Technology (see page 62).



Protect cabinetry from steam and grease with stainless steel liners that provide a custom fit.



Optional ACR3 remote control lets the busy cook stay in control from anywhere in the kitchen.

Hood Sizes

Widths 27-3/4", 36-1/2", 43-7/16"
Depth 15-13/16"

Finish

Stocked Brushed Stainless Steel
 Special Order Not Available

Features

Lighting Type Halogen 50W, GU10
 Number of Lamps 2 on 27" and 36" / 3 on 43"
 Lighting Levels 3
 Lighting Lamps Included Yes
 Control Type 3-speed Plus Boost Electronic Pushbutton
 Control Features Heat Sentry™, Delay Off, Filter Clean Reminder
 Remote Control Optional ACR3
 Filter Type Hi-Flow™ Baffle Filter
 Non-ducted Capability No

Hood Blower Included (PK22)

Internal	iQ12
Blower CFM	1200
Sones Low/High	
PK2230	0.6/11.5
PK2239	0.6/11.5
PK2245	0.6/11.0

Hood Blower Options (PKEX22 blowers sold separately)


External In-line	ILB3	ILB6	ILB9	ILB11
Max CFM	280	600	800	1100
Some levels are typically half of comparable CFM internal blowers.				
External Exterior (sold separately)	EB6	EB9	EB12	EB15
Max CFM	600	900	1200	1500
Some levels are typically half of comparable CFM internal blowers.				

Accessories

Liners: Optional AL3036, AL3042, AL3948, AL3954, AL4554, AL4560
 Optional Transition 10" to 8" Reducer Model 472
 Universal MUA Damper MD6TU, MD8TU or MD10TU
 Fresh Air Inlets 641FA (6"), 643FA (8"), 610FA (10")

Installation Requirements

Amps @ 120V 8.0 for PK2230, PK2239; 8.5 for PK2245
 Electrical Direct Wire
 Duct Size 10"
 Duct Direction Vertical
 Backdraft Damper Included

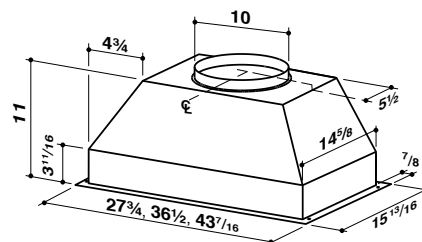

Only PK2230, PK2239 and PK2245 have internal blowers

27-3/4" width not available in PKEX models

Installation height above the cooking surface: 24"-30"

For more details see the product specifications sheet found at www.BESTRangeHoods.com

