



Classic 10" Pro-Style for under cabinet applications.

Exclusive iQ Blower System™ with GPS Technology (see page 58) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; choice of 13 Internal or External blower options offered separately.

Bright Halogen lighting floods the cooktop and surrounding area for clear visibility.

Mesh lined Hi-Flow baffle filters provide superior grease capture to ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Works with optional Universal Make-Up Air Dampers.

**Model Numbers:**

UP26M30SB

UP26M36SB

UP26M42SB

UP26M48SB



Rotary controls for two-level lighting and variable blower speeds enable the user to choose operating preferences.



Hi-Flow baffle filters utilize a V-mesh & baffle design to increase airflow, lower sound levels and provide excellent ventilation efficiency.



A professional style RMP backsplash with built-in holding racks provides a dramatic and functional backdrop for your BEST® wall-mounted range hood. When protection is needed, an RMP backsplash is an easy-to-clean option to materials such as tile and stone.

**Hood Sizes**

**Widths** 30", 36", 42", 48"

**Depth** 22"

Must purchase blower separately.

**Finish**

Stocked Brushed Stainless Steel (Grade 430)

Special Order Not Available

**Features**

Lighting Type Halogen, GU10, MR16, 50-watt

Number of Lamps 2 on 30", 36" | 3 on 42", 48"

Lighting Levels 2

Lighting Lamps Included Yes

Control Type Infinite Speed Rotary with Last Setting Memory

Control Features Heat Sentry™

Remote Control Not Available

Filter Type Hi-Flow Baffle Filter

Non-ducted Capability No

**Hood Blower Options** (Must choose one blower sold separately)

Internal Modular	iQ6 <sup>1</sup>	P3	P5	P6	P8 <sup>1</sup>
Max Blower CFM*	800	300	530	650	950
Sones Normal Setting**	0.3	0.3	0.6	2.0	1.3

\*MAX Blower CFM indicates the performance of the hood blower in open air.

\*\*Normal setting corresponds to speed 1.

External In-line	ILB3	ILB6	ILB9	ILB11
Max CFM	300	675	900	1500
Some levels are typically half of comparable CFM internal blowers.				
External Exterior	EB6	EB9	EB12	EB15
Max CFM	665	890	1300	1650
Some levels are typically half of comparable CFM internal blowers.				

<sup>1</sup>P8 cannot be used with 30" width

**Accessories**

Backsplashes RMP3004, RMP3604, RMP4204, RMP4804

Universal MUA Damper MD6TU, MD8TU, MD10TU (Requires Fresh Air Inlet)

CFM Reducer Kit ARP8 (use with P6 blower only)

Fresh Air Inlet 641FA, 643FA, 610FA

**Installation Requirements**

Amps @ 120V 7.7 Max

Electrical Connection Direct Wire


Duct Size: Internal Blower 8" (iQ6, P3, P6)

Duct Size: Internal Blower 3-1/4" x 10" (P5); x14" (P8)

Duct Size: External Blower 10" (at hood)

Duct Direction Vertical & Horizontal (P5 & P8 only)

Backdraft Damper Included

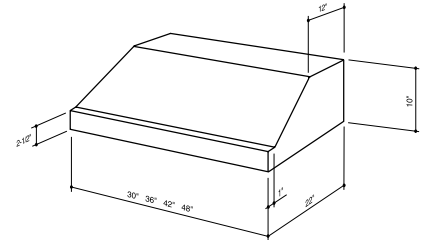

Installation height above the cooking surface: 24"-36"


For more details or HVI rated performance for this model see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)



<sup>1</sup>If needed, ask a recommended installer to limit discharge to 300 or 400 CFM.

**RMP Backsplash**

- Height: 33-1/2"
- Width: 30", 36", 42", 48", 54" & 60"
- Finish: Standard Stainless Steel



**Performance is a beautiful thing.**

It can be subtle or bold. It can take months or years to hone.  
Then impress you in an instant.

A great performance gives the audience exactly what they want and more than they ever imagined. And it inspires everyone and everything around it to be better.

At **BEST**, we make high performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.

**best**<sup>®</sup>

**PERFORMANCE THAT INSPIRES**