



Contemporary 10" Pro-Style for under cabinet applications.

Exclusive iQ Blower System™ with GPS Technology (see page 58) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; choice of 11 Internal or External blower options offered separately.

Canopy design utilizes fully welded construction for seamless appearance.

Bright Halogen lighting floods the cooktop and surrounding area for clear visibility.

Mesh lined Hi-Flow baffle filters provide superior grease capture to ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Works with optional Universal Make-Up Air Dampers.

**Model Numbers:**

UP27M30SB

UP27M36SB

UP27M42SB

UP27M48SB



Infinite speed control with last setting memory.



Halogen lamps brilliantly illuminate the cooktop.



Hi-Flow baffle filters utilize a V-mesh & baffle design to increase airflow, decrease sound levels and provide excellent ventilation efficiency.

**Hood Sizes**

**Widths** 30", 36", 42", 48"

**Depth** 22"

Must purchase blower separately.

**Finish**

Stocked Brushed Stainless Steel (Grade 304)—Seamless  
Special Order Not Available

**Features**

Lighting Type Halogen, GU10, MR16, 50-watt  
Number of Lamps 2 on 30", 36" | 4 on 42", 48"  
Lighting Levels Variable  
Lighting Lamps Included Yes  
Control Type Infinite Speed Rotary with Last Setting Memory  
Control Features Heat Sentry™  
Remote Control Not Available  
Filter Type Hi-Flow Baffle Filter  
Non-ducted Capability No

**Hood Blower Options** (Must choose one blower sold separately)

Internal Modular	iQ6 <sup>1</sup>	P3	P6
Max Blower CFM*	800	300	650
Sones Normal Setting**	0.3	0.3	2.0

\*MAX Blower CFM indicates the performance of the hood blower in open air.  
\*\*Normal setting corresponds to speed 1.


External In-line	ILB3	ILB6	ILB9	ILB11
Max CFM	300	675	900	1500
Some levels are typically half of comparable CFM internal blowers.				
External Exterior	EB6	EB9	EB12	EB15
Max CFM	665	890	1300	1650
Some levels are typically half of comparable CFM internal blowers.				

**Accessories**

Universal MUA Damper MD6TU, MD8TU, MD10TU (Requires Fresh Air Inlet)  
CFM Reducer Kit ARP314 (use with P6 blower only)  
Fresh Air Inlet 641FA, 643FA, 610FA

**Installation Requirements**

Amps @ 120V 7.7 Max  
Electrical Connection Direct Wire  
Duct Size: Internal Blower 8"  
Duct Size: External Blower 10" (at hood)  
Duct Direction Vertical  
Backdraft Damper Included

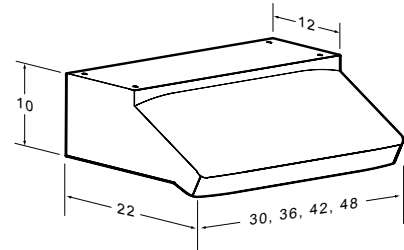

Installation height above the cooking surface: 24"-36"

For more details or HVI rated performance for this model see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)



<sup>1</sup>If needed, ask a recommended installer to limit discharge to 300 or 400 CFM.



**Performance is a beautiful thing.**

It can be subtle or bold. It can take months or years to hone.  
Then impress you in an instant.

A great performance gives the audience exactly what they want and more than they ever imagined. And it inspires everyone and everything around it to be better.

At **BEST**, we make high performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.

**best**<sup>®</sup>

**PERFORMANCE THAT INSPIRES**