



Contemporary 18" Pro-Style for wall mount applications.

Exclusive iQ Blower System™ with GPS Technology (see page 58) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; choice of 13 Internal or

External blower options offered separately.

Bright Halogen lighting floods the cooktop and surrounding area for clear visibility.

Mesh lined Hi-Flow baffle filters provide superior grease capture to ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Works with optional Universal Make-Up Air Dampers.

Model Numbers:

WP29M304SB	WP29M424SB	WP29M544SB
WP29M364SB	WP29M484SB	WP29M604SB



Optional non-duct recirculation kit for hoods up to 48" using BEST® single internal blower.



Variable speed control with last setting memory.



Halogen lamps brilliantly illuminate the cooktop.



Hi-Flow baffle filters utilize a V-mesh & baffle design to increase airflow, lower sound levels and provide excellent ventilation efficiency.

Hood Sizes

Widths	30", 36", 42", 48", 54", 60"
Depth	24"

Must purchase blower separately.

Finish

Stocked	Brushed Stainless Steel (Grade 304)—Seamless
Special Order	Not Available

Features

Lighting Type	Halogen, GU10, MR16, 50-watt
Number of Lamps	4 on 30", 36", 42" 6 on 48", 54", 60"
Lighting Levels	Variable
Lighting Lamps Included	Yes
Control Type	Infinite Speed Rotary with Memory
Control Features	Heat Sentry™
Remote Control	Not Available
Filter Type	Hi-Flow Baffle Filter
Non-ducted Capability	Yes

Hood Blower Options (Must choose one blower sold separately)

Internal Modular	iQ6 ¹	iQ12	P3	P6	P12
Max Blower CFM*	800	1500	300	650	1300
Sones Normal Setting**	0.3	0.6	0.3	2.0	2.25

*MAX Blower CFM indicates the performance of the hood blower in open air.
**Normal setting corresponds to speed 1.


External In-line	ILB3	ILB6	ILB9	ILB11
Max CFM	300	675	900	1500
Sone levels are typically half of comparable CFM internal blowers.				
External Exterior	EB6	EB9	EB12	EB15
Max CFM	665	890	1300	1650
Sone levels are typically half of comparable CFM internal blowers.				

Accessories

Decorative Soffit Flue	AEWP302SB, AEWP362SB, AEWP422SB, AEWP482SB, AEWP542SB, AEWP602SB
Non-Duct Kit for iQ6, P3 and P6	ANKWP306RSB, ANKWP366RSB, ANKWP426RSB, ANKWP486RSB
Non-Duct Filter	AFCROUND2
Universal MUA Damper	MD6TU, MD8TU, MD10TU (Requires Fresh Air Inlet)
CFM Reducer Kit	ARP8 (use with P6 blower only)
Fresh Air Inlet	641FA, 643FA, 610FA

Installation Requirements

Amps @ 120V	6.0 Max
Electrical Connection	Direct Wire
Duct Size: Internal Blower	8" (iQ6, P3, P6) 10" (iQ12, P12)
Duct Size: External Blower	10" (at hood)
Duct Direction	Vertical and Horizontal
Backdraft Damper	Included with Blower

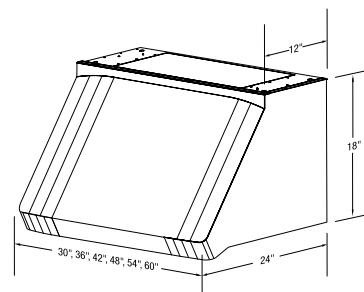

Installation height above the cooking surface: 24"-36"


For more details or HVI rated performance for this model see the product specifications sheet found at www.BESTRangeHoods.com



¹If needed, ask a recommended installer to limit discharge to 300 or 400 CFM.


AEWP Decorative Soffit Flue

A soffit flue is available in brushed stainless steel, and attaches to the top of the range hood shell. It is available in all hood widths and 12" heights.



ANKWP Non-Duct Soffit Kit

A non-ducted soffit flue kit is available in hood widths up to 48", in a 6" height.



Performance is a beautiful thing.

It can be subtle or bold. It can take months or years to hone.
Then impress you in an instant.

A great performance gives the audience exactly what they want and more than they ever imagined. And it inspires everyone and everything around it to be better.

At **BEST**, we make high performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.

best[®]

PERFORMANCE THAT INSPIRES